



MAKING A HOUSE YOUR HOME

Finding ways to reflect your style, your taste and your way of living is truly what turns a house into your very own home. Little details, like the way a well-crafted door feels when it opens and closes, create a sense of well-being in subtle but important ways. Families everywhere rely on JELD-WEN for many of these important details: the energy efficiency of their windows, the safety and security of their front doors, and the steadfast performance of all wproducts, including those inside.



For the complete line of JELD-WEN® windows and doors,
visit us online at www.jeld-wen.com.

RELIABILITY FOR REAL LIFE

JELD-WEN materials and craftsmanship represent enduring quality. Solid and familiar, just the way you like it. And whether your home is completely contemporary or a traditional colonial, choosing well will always mean looking to a trusted source—JELD-WEN.

REFLECT YOUR STYLE



Each one of our windows and patio doors is built to last. We prove this by supporting each product with our lifetime limited warranty.

RELIABILITY *for real life*®



REDUCE SOUND—INCREASE FIRE RATINGS

ProCore[®]

THE QUIET DOOR[®]

ProCore solid core construction is available with all our Molded and Flush doors.

This solid core door reduces the transmission of sound by up to 50 percent (compared to a hollow flush door). Furthermore, this option helps prevent the dents and dings of daily life.

Fire door
option
available



Our 1-3/4" doors are also available with 20-minute, 45-minute and 60-minute fire ratings. For true fire protection and solid safety, these doors must be teamed with certified frames and hardware.

The core, or the materials used inside the door, affects the weight of the door, its ability to withstand impact, its fire rating and even sound transmission.

Solid Particleboard Core:
Combination Wood/MDF
or All-Wood Frame



Wide Stile with Solid
Particleboard Core:
Wood Frame



TABLE OF CONTENTS



Table of Contents

ProCore-The Quiet Door® 4

Molded Doors

Craftsman III™ 6

Cambridge..... 7

Camden® & Princeton..... 8

Continental™ 9

Santa Fe 10

Avalon®..... 11

Atherton® & Stanford..... 12

Provincial® 13

Rockport™ 14

Arlington 15

Bostonian®, Colonial & Bristol..... 16

Impression™ Mirror 17

Prefinished Molded Doors..... 18

Molded Commercial Wide Stile Doors 19

Molded Door Designs 20

Molded Door Construction 21

Flush Doors

Flush Door Designs..... 22

Flush Door Construction 23

Molded Door Size and Profile Options 24

6'8" and 7'0" Doors..... 25

8'0" Doors 33

8'0" and Bifold Doors..... 36

Warranty 37

About JELD-WEN®..... 38



CRAFTSMAN III™

Our Craftsman III doors reflect the unadorned, aesthetically balanced design created over a century ago. These doors are the perfect choice for traditional homes. Their clean, geometric lines also make them increasingly popular with contemporary style homes.

Available with

ProCORE
THE QUIET DOOR®



JELD-WEN Exclusive

Craftsman sticking
with Flat Panels



Passage



Narrow



Bifold

CAMBRIDGE

With its simple, straight lines, this two-panel Molded interior door is a natural with almost any interior architecture, contemporary or traditional. The Cambridge has an ovolo sticking profile and a smooth surface.

Available with

ProCORE
THE QUIET DOOR®



Cambridge - Smooth

Our smooth surface doors let you give your home a streamlined, contemporary feeling. They feature the look of painted wood doors.



Passage



Narrow



Bifold



8'0" Passage



CAMDEN® & PRINCETON

The Camden and Princeton doors have classic design profiles that make them beautiful in homes that are more traditional in their architecture. These two-panel doors with a modified cove and bead sticking profile are identical in every way with the exception of surface—the Camden has a woodgrain surface; the Princeton has a smooth surface.

Available with

ProCORE
THE QUIET DOOR®



Princeton - Smooth

Our smooth surface doors let you give your home a streamlined, contemporary feeling. They feature the look of painted wood doors.



Camden - Woodgrain

JELD-WEN® interior doors with woodgrain surfaces emulate the look of solid wood doors.



Passage



Narrow



Bifold



8'0" Passage

CONTINENTAL™

As its name would suggest, the Continental is reminiscent of classic European architecture and lends itself well to homes that are more traditional in style. This is a two-panel door with an ovolo sticking profile and a smooth surface.

Available with

ProCORE
THE QUIET DOOR®



Continental - Smooth

Our smooth surface doors let you give your home a streamlined, contemporary feeling. They feature the look of painted wood doors.



Passage



Narrow



Bifold



8'0" Passage



SANTA FE

Designed with the architectural warmth of a planked, solid wood door, the Santa Fe offers you the strength and affordability of a Molded interior door. It has a smooth surface with ovolo sticking and is ready to be painted.

Available with

ProCORE
THE QUIET DOOR®



Santa Fe - Smooth

Our smooth surface doors let you give your home a streamlined, contemporary feeling. They feature the look of painted wood doors.



Passage



Narrow



Bifold



8'0" Passage

AVALON®

The Avalon, with its straight-lined, three-panel format, can adapt as easily to a contemporary home as it can to one with more traditional design roots. The Avalon offers a modified cove and bead sticking profile, and comes with a woodgrain surface.

Available with

ProCORE
THE QUIET DOOR®



Avalon - Woodgrain

JELD-WEN® interior doors with woodgrain surfaces emulate the look of solid wood doors.



Passage



Narrow



Bifold



ATHERTON® & STANFORD®

Distinguished by the beautiful simplicity of a four-panel design and ovolo sticking profile, the Atherton and Stanford Molded interior doors adapt comfortably to almost any interior environment. The Atherton has a smooth surface; the Stanford has woodgrain.

Available with

ProCORE
THE QUIET DOOR®



Atherton - Smooth

Our smooth surface doors let you give your home a streamlined, contemporary feeling. They feature the look of painted wood doors.



Stanford - Woodgrain

JELD-WEN® interior doors with woodgrain surfaces emulate the look of solid wood doors.



Passage



Narrow



Bifold



8'0" Passage

PROVINCIAL®

This four-panel door with its woodgrain surface and ovolo sticking profile is designed to work with classic architectural styles of virtually every description.

Available with

ProCORE
THE QUIET DOOR®



Provincial - Woodgrain

JELD-WEN® interior doors with woodgrain surfaces emulate the look of solid wood doors.



Passage



Narrow



Bifold



ROCKPORT™

With all the classic charm of a bygone era, it's truly one of a kind. Its smooth surface and modified cove and bead sticking profile add traditional warmth to any room.

Available with

ProCORE
THE QUIET DOOR®



Rockport - Smooth

Our smooth surface doors let you give your home a streamlined, contemporary feeling. They feature the look of painted wood doors.




Passage



Narrow



Bifold

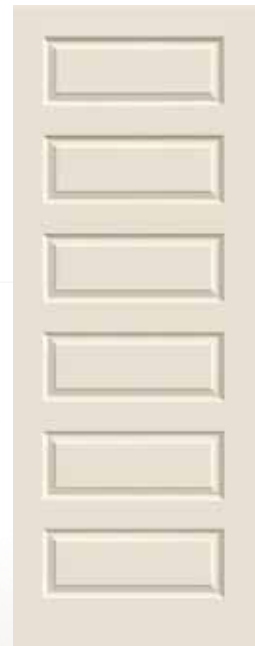

8'0" Passage

ARLINGTON

With its handsome beaded sticking profile, the Arlington is the first Molded interior door with double-hip raised panels—a premium look at an affordable price.

Available with

ProCORE
THE QUIET DOOR®



Arlington- Smooth

Our smooth surface doors let you give your home a streamlined, contemporary feeling. They feature the look of painted wood doors.



Passage



Narrow



Bifold



8'0" Passage



BOSTONIAN®, COLONIAL & BRISTOL

These six-panel doors are perfectly suited to the classic American architecture of so many homes. The Colonial has a woodgrain surface with an ovolo sticking profile; the Bostonian has a woodgrain surface with a modified cove and bead sticking profile; and the Bristol has a smooth surface and modified cove and bead sticking profile.

Available with

ProCORE
THE QUIET DOOR®



Bristol - Smooth

Our smooth surface doors let you give your home a streamlined, contemporary feeling. They feature the look of painted wood doors.



Bostonian, Colonial - Woodgrain

JELD-WEN® interior doors with woodgrain surfaces emulate the look of solid wood doors.



Passage



Narrow



Bifold



8'0" Passage

IMPRESSION™ MIRROR

The Impression mirror door casts daylight throughout your whole room, so it becomes brighter and appears larger. At night, it will reflect the glow of your table lamps and other ambient light to add a warm, comforting touch.

One side of the door has a beveled mirror with a protective film for easy painting, the other features your choice of any of our 4 or 6 panel designs.



The Impression mirror door is built with special adhesives, eliminating the need for a clunky lip moulding to hold the mirror on the door's surface.

This way, all you see is the perfectly beveled edge of the mirror. This door complies with ANSI Z97.1 Safety Requirements.

Side A



Beveled Mirror

Side B



Provincial



Atherton,
Stanford




Colonial,
Bostonian,
Bristol



Arlington

You can easily accommodate an Impression door in any space:

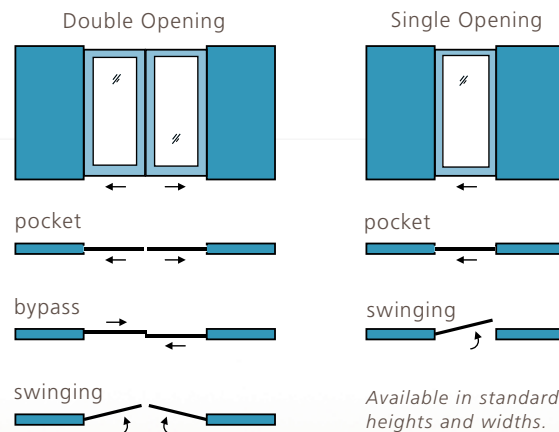

Available in standard heights and widths. See page 29 for specifications.

PREFINISHED MOLDED DOORS

The absolute simplicity of having your doors stained, finished and ready to be installed upon arrival is a real advantage, especially when you're on a tight timeline.

This JELD-WEN line of six-panel, prefinished doors comes to you in your choice of several warm wood tones, providing both depth and texture to your home's interior. Every prefinished passage and bifold door is available in widths from 1'0" to 3'0".

Available with

ProCORE
THE QUIET DOOR®



Due to the natural characteristics inherent to wood products and primers, JELD-WEN® prefinished interior doors will have some degree of variation in color tone. While we take careful measures to maintain consistency, some color fluctuation is to be expected.

Prefinished Stains

(availability may vary by region)



Imperial Oak

Prefinished Paint

(availability may vary by region)



Prefinished
White



Prefinished 6-Panel

MOLDED COMMERCIAL WIDE STILE DOORS

Rely on JELD-WEN® to come through as a trusted source for meeting your very specific, larger scale interior door requirements. Our wide stile doors are so solid and dependable, you'll find them used in hospitality and residential venues of virtually every description.

These doors are designed to accommodate commercial-grade, self-closing hardware on the top rail, a kick plate on the bottom rail and a variety of panic bar options. Extra-wide stiles make it possible to install a variety of commercial locking systems, including card key locks.

JELD-WEN wide stile doors have a 20-, 45- or 60-minute fire rating; doors 6'8" and higher are ADA-compliant.

Available with

PROCORE
THE QUIET DOOR®



Continental™
Commercial Wide Stile
Smooth surface
Ovolo sticking profile



Colonial
Commercial Wide Stile
Woodgrain surface
Ovolo sticking profile



Arlington
Commercial Wide Stile
Smooth surface
Beaded sticking profile

MOLDED DOOR DESIGNS AT-A-GLANCE

Craftsman

Smooth Surface - Flat Panel



Craftsman III
Flat Panels
Craftsman Sticking
6'8" & 7'0"

Smooth Surface - Raised Panel



Bristol
Modified Cove
& Bead Sticking
6'8", 7'0" & 8'0"



Arlington
Beaded Sticking
Exclusive to
JELD-WEN
6'8", 7'0" & 8'0"



Rockport™
Modified Cove
& Bead Sticking
6'8", 7'0" & 8'0"



Atherton®
Ovolo Sticking
6'8", 7'0" & 8'0"

Smooth Surface - Raised Panel



Santa Fe
Ovolo Sticking
6'8", 7'0"
and 8'0"



Continental™
Ovolo Sticking
6'8", 7'0"
and 8'0"



Princeton
Modified Cove
& Bead Sticking
6'8", 7'0"
and 8'0"



Cambridge
Ovolo Sticking
6'8", 7'0"
and 8'0"

Impression Mirror



Impression™ Mirror Door

Side A: Beveled Mirror

Side B: 6-Panel Colonial

or Bostonian (woodgrain)

6-Panel Arlington (smooth)

6-Panel Bristol



4-Panel Atherton

4-Panel Provincial

4-Panel Stanford



Woodgrain Surface - Raised Panel



Colonial
Ovolo Sticking
6'8", 7'0" & 8'0"



Bostonian®
Modified Cove
& Bead Sticking
6'8", 7'0" & 8'0"



**Prefinished
6-Panel**
Ovolo Sticking
6'8" & 7'0"



Provincial®
Ovolo Sticking
6'8" & 7'0"



Stanford®
Ovolo Sticking
6'8" & 7'0"



Avalon®
Modified Cove
& Bead Sticking
6'8" & 7'0"



Camden®
Modified Cove
& Bead Sticking
6'8" & 7'0"

MOLDED DOOR CONSTRUCTION

Whether traditional or contemporary, JELD-WEN has sticking profile options that will distinguish the interior of your home with beautiful quality and attention to design detail.

Craftsman Sticking
JELD-WEN Exclusive



Beaded Sticking
Exclusive feature on Arlington door



Ovolo Sticking



Modified Cove & Bead Sticking



The core, or the materials used inside the door, affects the weight of the door, its ability to withstand impact, its fire rating and even sound transmission.

Solid Particleboard Core: Combination Wood/MDF or All-Wood Frame



1-3/8" Door
1-3/4" Door

20-minute fire rating available for 1-3/4" up to 3'0" x 8'0"

PROCORE
THE QUIET DOOR®

Solid Mineral Core: All-Wood Frame



1-3/4" Door

45- or 60-minute fire ratings up to 3'0" x 8'0", manufactured to the current Georgia-Pacific or Marshfield Door Systems specifications

Wide Stile with Solid Particleboard Core: Wood Frame



1-3/4" Door

20-minute fire rating

PROCORE
THE QUIET DOOR®

Hollow Core: Wood/MDF Frame



1-3/8" Door

Blocking behind panels for support*

*Hollow core construction may vary by region

FLUSH DOOR DESIGNS

Our Flush interior doors are available in a wide range of finish colors and woodgrains. The veneer samples shown below represent only a small offering of the many prefinished embossed and smooth medium density fiberboard colors and unfinished hardwood veneer species we offer. For a complete list of colors available to you, please contact your local dealer.



All Flush interior doors are available with ProCore the Quiet Door® construction for superior sound control.

In addition to these options, we provide a selection of sizes. Our flush doors come in widths of 1'0" through 4'0" and heights of 6'8", 7'0" and 8'0".

Unfinished Hardwood Veneer

Offered in several species (Regional availability, please check with your dealer.)



Sliced Red Oak



Tropical
Hardwood



Rotary-Cut Birch

Variances in photography and printing may cause the finish colors shown in this catalog to differ from actual finishes.

FLUSH DOOR CONSTRUCTION

While keeping the look of interior doors consistent throughout your home, you may choose to vary the core of each, depending on the room in which the door will be installed. The core you select will determine the door's weight, impact resistance, fire rating and sound transmission.

Solid Particleboard Core: Wood or MDF Frame



1-3/8" Door

1/8" door facings with premium hardwood veneers or preprimed, un-primed or prefinished MDF

1-3/4" Door

1/8" door facings with premium hardwood veneers or preprimed, un-primed or prefinished MDF 20-minute fire rating available in 1-3/4" up to 4'0" x 8'0"

PROCORE
THE QUIET DOOR®

Solid Mineral Core: Mineral Composite Frame



1-3/4" Door

45-, 60- and 90-minute fire ratings manufactured to the current Georgia-Pacific or Marshfield Door System specifications 1/8" door facings with premium hardwood veneers or preprimed, un-primed or prefinished MDF

Solid Wood Stave Core: Wood Frame



1-3/8" Door

1/8" door facings with premium hardwood veneers or preprimed, un-primed or prefinished MDF

1-3/4" Door

1/8" door facings with premium hardwood veneers or preprimed, un-primed or prefinished MDF 20-minute fire rating available in 1-3/4" up to 4'0" x 8'0"

PROCORE
THE QUIET DOOR®

Hollow Core: Combination Wood/MDF Frame



1-3/8" Door

Corrugated honeycomb cell core 1/8" door facings with premium hardwood veneers or preprimed, un-primed or prefinished MDF

Please check with your local JELD-WEN dealer, distributor or plant for available frame options.

MOLDED DOOR SIZE AND PROFILE OPTIONS

6'8" and 7'0" Doors	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	Sticking Profile	ProCore®	Bifolds
ARLINGTON 6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	B	X	X
ARLINGTON 7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	B	X	X
ATHERTON® 6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
ATHERTON 7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
AVALON® 6'8" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
AVALON 7'0" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
BOSTONIAN® 6'8" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
BOSTONIAN 7'0" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
BRISTOL 6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
BRISTOL 7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
CAMBRIDGE 6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
CAMBRIDGE 7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
CAMDEN® 6'8" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
CAMDEN 7'0" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
COLONIAL 6'8" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
COLONIAL 7'0" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
CONTINENTAL™ 6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
CONTINENTAL 7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
CRAFTSMAN III™ 6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	C	X	X
CRAFTSMAN III™ 7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	C	X	X
IMPRESSION™ Arlington 6'8" Smooth	–	–	–	–	–	–	–	X	–	X	X	X	–	X	B	–	–
IMPRESSION Colonial 6'8" Woodgrain	–	–	–	–	–	–	–	X	–	X	X	X	–	X	O	–	–
IMPRESSION Bostonian 6'8" Woodgrain	–	–	–	–	–	–	–	X	–	X	X	X	–	X	MCB	–	–
PRINCETON 6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
PRINCETON 7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
PROVINCIAL® 6'8" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
PROVINCIAL 7'0" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
ROCKPORT™ 6'8" Smooth	–	–	–	–	X	X	–	X	X	X	X	X	X	X	MCB	X	X
ROCKPORT 7'0" Smooth	–	–	–	–	–	–	–	X	X	X	X	X	X	X	MCB	X	X
SANTA FE 6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
SANTA FE 7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
STANFORD® 6'8" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
STANFORD 7'0" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
8'0" Doors	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	Sticking Profile	ProCore®	Bifolds
ARLINGTON 8'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	B	X	X
ATHERTON 8'0" Smooth	–	–	–	–	–	–	X	X	X	X	X	X	X	X	O	X	X
BOSTONIAN 8'0" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
BRISTOL 8'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
CAMBRIDGE 8'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
COLONIAL 8'0" Woodgrain	–	–	–	–	X	X	X	X	X	X	X	X	–	X	O	X	X
CONTINENTAL 8'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
PRINCETON 8'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
ROCKPORT 8'0" Smooth	–	–	–	–	X	X	–	X	X	X	X	X	X	X	MCB	X	–
SANTA FE 8'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X


Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

Please check your local distributor for availability of 7'0" and 8'0" doors in your area.

For more detailed product specifications, please check out our JELD-WEN product line at www.jeld-wen.com.


6'8" AND 7'0" DOORS

ARLINGTON



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	5-1/2"	3-1/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth
1'2"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7-1/2"	3-1/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth
1'3" 1'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	8" 9"	3-1/2"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth
1'6" 1'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	9-13/16"	4-3/32" (1'6") 5-3/32" (1'8")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth
1'10" 2'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	5-1/2"	3-1/2" (1'10") 4-1/2" (2'0")	4"	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth
2'2" 2'4"	6'8" 7'0"	Six	1-3/8" 1-3/4"	7-1/2"	3-1/2" (2'2") 4-1/2" (2'4")	4"	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth
2'6"	6'8" 7'0"	Six	1-3/8" 1-3/4"	8"	4-1/2"	5"	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth
2'8"	6'8" 7'0"	Six	1-3/8" 1-3/4"	9"	4-1/2"	5"	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth
2'10" 3'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	9-13/16"	4-1/2" (2'10") 5-1/2" (3'0")	5-3/8"	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth

ATHERTON®




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	5-9/16"	3-7/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7-9/16"	3-7/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'3"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-9/16"	3-7/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-9/16"	3-7/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-9/16"	3-7/32" (1'6") 4-3/16" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'10" 2'0"	6'8" 7'0"	Four	1-3/8" 1-3/4"	5-9/16"	3-9/32" (1'10") 4-9/32" (2'0")	4-9/16"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
2'2" 2'4"	6'8" 7'0"	Four	1-3/8" 1-3/4"	7-9/16"	3-9/32" (2'2") 4-9/32" (2'4")	4-5/16"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
2'6"	6'8" 7'0"	Four	1-3/8" 1-3/4"	8-9/16"	4-9/32"	4-5/16"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
2'8"	6'8" 7'0"	Four	1-3/8" 1-3/4"	9-9/16"	4-9/32"	4-5/16"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
2'10" 3'0"	6'8" 7'0"	Four	1-3/8" 1-3/4"	11-9/16"	3-9/32" (2'10") 4-9/32" (3'0")	4-5/16"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.


6'8" AND 7'0" DOORS

AVALON®



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	6-3/16"	2-29/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	7-15/16" (6'8") 9-15/16" (7'0")	MCB	Oak Grain
1'2" 1'3" 1'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7-11/16"	3-5/32" (1'2") 3-21/32" (1'3") 4-5/32" (1'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	7-15/16" (6'8") 9-15/16" (7'0")	MCB	Oak Grain
1'6" 1'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	8-3/4"	4-5/8" (1'6") 5-5/8" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	7-15/16" (6'8") 9-15/16" (7'0")	MCB	Oak Grain
1'10" 2'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	15-5/8"	3-3/16" (1'10") 4-3/16" (2'0")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	7-15/16" (6'8") 9-15/16" (7'0")	MCB	Oak Grain
2'2" 2'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	19-5/8"	3-3/16" 2'2") 4-3/16" (2'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	7-15/16" (6'8") 9-15/16" (7'0")	MCB	Oak Grain
2'6"	6'8" 7'0"	Three	1-3/8" 1-3/4"	21-5/8"	4-3/16"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	7-15/16" (6'8") 9-15/16" (7'0")	MCB	Oak Grain
2'8" 2'10"	6'8" 7'0"	Three	1-3/8" 1-3/4"	23-5/8"	4-3/16" (2'8") 5-3/16" (2'10")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	7-15/16" (6'8") 9-15/16" (7'0")	MCB	Oak Grain
3'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	27-5/8"	4-3/16"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	7-15/16" (6'8") 9-15/16" (7'0")	MCB	Oak Grain


BOSTONIAN®



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Pine Grain
1'6" 1'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	11-7/8"	3-1/16" (1'6") 4-1/16" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Pine Grain
1'10" 2'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	5-7/8"	3-3/16" (1'10") 4-3/16" (2'0")	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Pine Grain
2'2" 2'4"	6'8" 7'0"	Six	1-3/8" 1-3/4"	7-7/8"	3-3/16" (2'2") 4-3/16" (2'4")	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Pine Grain
2'6"	6'8" 7'0"	Six	1-3/8" 1-3/4"	8-7/8"	4-3/16"	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Pine Grain
2'8"	6'8" 7'0"	Six	1-3/8" 1-3/4"	9-7/8"	4-3/16"	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Pine Grain
2'10"	6'8" 7'0"	Six	1-3/8" 1-3/4"	10-7/8"	4-3/16"	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Pine Grain
3'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	11-7/8"	4-3/16"	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Pine Grain


Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



BRISTOL

Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
1'6" 1'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	11-15/16"	3-1/32" (1'6") 4-1/32" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
1'10" 2'0" 2'2"	6'8" 7'0"	Six	1-3/8" 1-3/4"	5-15/16"	3-1/8" (1'10") 4-1/8" (2'0") 5-1/8" (2'2")	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
2'4"	6'8" 7'0"	Six	1-3/8" 1-3/4"	7-15/16"	4-1/8"	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
2'6"	6'8" 7'0"	Six	1-3/8" 1-3/4"	8-15/16"	4-1/8"	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
2'8" 2'10"	6'8" 7'0"	Six	1-3/8" 1-3/4"	9-15/16"	4-1/8" (2'8") 5-1/8" (2'10")	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
3'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	11-15/16"	4-1/8"	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth



CAMBRIDGE


Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	5-9/16"	3-7/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7-9/16"	3-7/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'3"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-9/16"	3-7/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-9/16"	3-7/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-9/16"	3-7/32" (1'6") 4-7/32" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'10" 2'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	13-11/16"	4-1/8" (1'10") 5-1/8" (2'0")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
2'2" 2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	17-11/16"	4-1/8" (2'2") 5-1/8" (2'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-1/8"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
2'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-1/8"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
2'10" 3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	23-3/4"	5-1/8" (2'10") 6-1/8" (3'0")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.


6'8" AND 7'0" DOORS

CAMDEN®



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6-11/16"	2-5/8"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain
1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7-1/2"	3-1/4" (1'2") 3-3/4" (1'3") 4-1/4" (1'4")	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-1/2"	4-1/4" (1'6") 5-1/4" (1'8")	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	15"	3-1/2" (1'0") 4-1/2" (2'0") 5-1/2" (2'2")	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain
2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18"	5" (2'4")	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain
2'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	22-3/4"	4-5/8"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain
2'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	22-3/4"	5-5/8"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain
3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	25"	5-1/2"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain

COLONIAL




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Pine Grain
1'6" 1'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	11-9/16"	3-7/32" (1'6") 4-7/32" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Pine Grain
1'10" 2'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	5-9/16"	3-1/4" (1'10") 4-1/4" (2'0")	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Pine Grain
2'2" 2'4"	6'8" 7'0"	Six	1-3/8" 1-3/4"	7-9/16"	3-1/4" (2'2") 4-1/4" (2'4")	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Pine Grain
2'6"	6'8" 7'0"	Six	1-3/8" 1-3/4"	8-9/16"	4-1/4"	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Pine Grain
2'8"	6'8" 7'0"	Six	1-3/8" 1-3/4"	9-9/16"	4-1/4"	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Pine Grain
2'10"	6'8" 7'0"	Six	1-3/8" 1-3/4"	10-9/16"	4-1/4"	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Pine Grain
3'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	11-9/16"	4-1/4"	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Pine Grain

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman


*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

CONTINENTAL™




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	5-9/16" 8-9/16"	3-7/32" (1'0") 2-23/32 (1'2")	N/A	5-1/4" (6'8") 7-1/4" (7'0")	4-3/16"	10-13/16" (6'8") 12-13/16" (7'0")	O	Smooth
1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-9/16"	3-7/32" (1'3") 3-23/32 (1'4")	N/A	5-1/4" (6'8") 7-1/4" (7'0")	4-3/16"	10-13/16" (6'8") 12-13/16" (7'0")	O	Smooth
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	10-9/16"	3-23/32" (1'6") 4-23/32" (1'8")	N/A	5-1/4" (6'8") 7-1/4" (7'0")	4-3/16"	10-13/16" (6'8") 12-13/16" (7'0")	O	Smooth
1'10" 2'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	14"	4" (1'10") 5" (2'0")	N/A	5-1/4" (6'8") 7-1/4" (7'0")	4-3/16"	10-13/16" (6'8") 12-13/16" (7'0")	O	Smooth
2'2" 2'4" 2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18" 18" 20"	4" (2'2") 5" (2'4") 5" (2'6")	N/A	5-1/4" (6'8") 7-1/4" (7'0")	4-3/16"	10-13/16" (6'8") 12-13/16" (7'0")	O	Smooth
2'8" 2'10" 3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21" 24" 24"	5-1/2" (2'8") 5" (2'10") 6" (3'0")	N/A	5-1/4" (6'8") 7-1/4" (7'0")	4-3/16"	10-13/16" (6'8") 12-13/16" (7'0")	O	Smooth

CRAFTSMAN III™



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	4"	4"	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	8-15/16" (6'8") 10-15/16" (7'0")	Flat	C	Smooth
1'2" 1'3"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6"	4" (1'2") 4-1/2" (1'3")	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	8-15/16" (6'8") 10-15/16" (7'0")	Flat	C	Smooth
1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-1/4"	3-7/8"	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	8-15/16" (6'8") 10-15/16" (7'0")	Flat	C	Smooth
1'6" 1'8" 1'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	10"	4" (1'6") 5" (1'8") 6" (1'10")	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	8-15/16" (6'8") 10-15/16" (7'0")	Flat	C	Smooth
2'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	15"	4-1/2"	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	8-15/16" (6'8") 10-15/16" (7'0")	Flat	C	Smooth
2'2" 2'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	17"	4-1/2" (2'2") 5-1/2" (2'4")	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	8-15/16" (6'8") 10-15/16" (7'0")	Flat	C	Smooth
2'6" 2'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	21"	4-1/2" (2'6") 5-1/2" (2'8")	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	8-15/16" (6'8") 10-15/16" (7'0")	Flat	C	Smooth
2'10" 3'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	25"	4-1/2" (2'10") 5-1/2" (3'0")	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	8-15/16" (6'8") 10-15/16" (7'0")	Flat	C	Smooth

IMPRESSION™ MIRROR DOOR



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
2'0"	6'8"	One	1-3/8"	15-3/8"	4-1/4"	N/A	4-1/4"	N/A	9-3/8"	**	Pine Grain or Smooth
2'4"	6'8"	One	1-3/8"	19-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	**	Pine Grain or Smooth
2'6"	6'8"	One	1-3/8"	21-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	**	Pine Grain or Smooth
2'8"	6'8"	One	1-3/8"	23-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	**	Pine Grain or Smooth
3'0"	6'8"	One	1-3/8"	27-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	**	Pine Grain or Smooth


Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

**Arlington Impression mirror doors have B sticking profile; Bostonian and Bristol Impression mirror doors have MCB sticking profile; Colonial Impression mirror doors have O sticking profile.


6'8" AND 7'0" DOORS

PRINCETON



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6-5/8"	2-11/16"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
1'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6-5/8"	3-5/8"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-1/2"	3-1/4" (1'3") 3-3/4" (1'4")	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-1/2"	4-1/4" (1'6") 5-1/4" (1'8")	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
1'10" 2'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	15"	3-1/2" (1'10") 4-1/2" (2'0")	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
2'2" 2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18"	3-15/16" (2'2") 4-15/16" (2'4")	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-3/4"	5-1/8"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
2'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	22-7/8"	4-5/8"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
2'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	22-7/8"	5-5/8"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	25"	5-1/2"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth

PROVINCIAL®




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	5-9/16"	3-7/32"	N/A	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
1'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7-9/16"	3-7/32"	N/A	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
1'3"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-9/16"	3-7/32"	N/A	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-9/16"	3-7/32"	N/A	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-9/16"	3-7/32" (1'6") 4-7/32" (1'8")	N/A	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
1'10" 2'0"	6'8" 7'0"	Four	1-3/8" 1-3/4"	5-9/16"	3-3/16" (1'10") 4-3/16" (2'0")	4-3/8"	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
2'2" 2'4"	6'8" 7'0"	Four	1-3/8" 1-3/4"	7-9/16"	3-1/4" (2'2") 4-1/4" (2'4")	4-3/8"	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
2'6"	6'8" 7'0"	Four	1-3/8" 1-3/4"	8-9/16"	4-1/4"	4-3/8"	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
2'8"	6'8" 7'0"	Four	1-3/8" 1-3/4"	9-9/16"	4-1/4"	4-3/8"	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
2'10"	6'8" 7'0"	Four	1-3/8" 1-3/4"	10-9/16"	4-1/4"	4-3/8"	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
3'0"	6'8" 7'0"	Four	1-3/8" 1-3/4"	11-9/16"	4-1/4"	4-3/8"	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.


ROCKPORT™



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'6"	6'8" 7'0"	Five	1-3/8" 1-3/4"	10-1/4"	3-7/8"	N/A	4-5/8" 6-1/2"	N/A	8-3/8" 10-1/2"	MCB	Smooth
1'8"	6'8" 7'0"	Five	1-3/8" 1-3/4"	10-1/4"	4-7/8" 3-7/8"	N/A	4-5/8" 6-1/2"	N/A	8-3/8" 10-1/2"	MCB	Smooth
2'0"	6'8" 7'0"	Five	1-3/8" 1-3/4"	15-3/4"	4-1/8"	N/A	4-1/2" (6'8") 6-1/2" (7'0")	N/A	8-1/2" (6'8") 10-1/2" (7'0")	MCB	Smooth
2'2" 2'4"	6'8" 7'0"	Five	1-3/8" 1-3/4"	19-3/4"	3-1/8" (2'2") 4-1/8" (2'4")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	N/A	8-1/2" (6'8") 10-1/2" (7'0")	MCB	Smooth
2'6"	6'8" 7'0"	Five	1-3/8" 1-3/4"	21-3/4"	4-1/8"	N/A	4-1/2" (6'8") 6-1/2" (7'0")	N/A	8-1/2" (6'8") 10-1/2" (7'0")	MCB	Smooth
2'8"	6'8" 7'0"	Five	1-3/8" 1-3/4"	23-3/4"	4-1/8"	N/A	4-1/2" (6'8") 6-1/2" (7'0")	N/A	8-1/2" (6'8") 10-1/2" (7'0")	MCB	Smooth
2'10" 3'0"	6'8" 7'0"	Five	1-3/8" 1-3/4"	25-3/4"	4-1/8" (2'10") 5-1/8" (3'0")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	N/A	8-1/2" (6'8") 10-1/2" (7'0")	MCB	Smooth


* All panel, inner stile, top rail and lock rail measurements will match those listed above. Outer stile measurements may vary 1/4" (depending on pre-fit). All bottom rail measurements will be 1" shorter than the measurements listed above in order to accommodate track and hardware.

SANTA FE



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-3/8" (6'8") 6-3/8" (7'0")	7"	9-7/8" (6'8") 11-7/8" (7'0")	O	Smooth
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	10"	4" (1'6") 5" (1'8")	N/A	4-3/8" (6'8") 6-3/8" (7'0")	7"	9-7/8" (6'8") 11-7/8" (7'0")	O	Smooth
1'10" 2'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	14"	4" (1'10") 5" (2'0")	N/A	4-3/8" (6'8") 6-3/8" (7'0")	7"	9-7/8" (6'8") 11-7/8" (7'0")	O	Smooth
2'2" 2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18"	4" (2'2") 5" (2'4")	N/A	4-3/8" (6'8") 6-3/8" (7'0")	7"	9-7/8" (6'8") 11-7/8" (7'0")	O	Smooth
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21"	4-1/2"	N/A	4-3/8" (6'8") 6-3/8" (7'0")	7"	9-7/8" (6'8") 11-7/8" (7'0")	O	Smooth
2'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	23"	4-1/2"	N/A	4-3/8" (6'8") 6-3/8" (7'0")	7"	9-7/8" (6'8") 11-7/8" (7'0")	O	Smooth
2'10" 3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	24"	5" (2'10") 6" (3'0")	N/A	4-3/8" (6'8") 6-3/8" (7'0")	7"	9-7/8" (6'8") 11-7/8" (7'0")	O	Smooth

STANFORD®




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Oak Grain
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-9/16"	3-7/32" (1'6") 4-7/32" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Oak Grain
1'10" 2'0"	6'8" 7'0"	Four	1-3/8" 1-3/4"	5-9/16"	3-1/4" (1'10") 4-1/4" (2'0")	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Oak Grain
2'2" 2'4"	6'8" 7'0"	Four	1-3/8" 1-3/4"	7-9/16"	3-1/4" (2'2") 4-1/4" (2'4")	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Oak Grain
2'6"	6'8" 7'0"	Four	1-3/8" 1-3/4"	8-9/16"	4-1/4"	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Oak Grain
2'8" 2'10"	6'8" 7'0"	Four	1-3/8" 1-3/4"	9-9/16"	4-1/4" (2'8") 5-1/4" (2'10")	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Oak Grain
3'0"	6'8" 7'0"	Four	1-3/8" 1-3/4"	11-9/16"	4-1/4"	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Oak Grain

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

6'8" AND 7'0" DOORS

PREFINISHED (STAINED) SIX-PANEL




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/8" (6'8") 6-1/8" (7'0")	6-7/8"	8-3/8" (6'8") 10-3/8" (7'0")	MCB	Oak Grain
1'6" 1'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	11-7/8"	3-1/16" (1'6") 4-1/16" (1'8")	N/A	4-1/8" (6'8") 6-1/8" (7'0")	6-7/8"	8-3/8" (6'8") 10-3/8" (7'0")	MCB	Oak Grain
1'10" 2'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	5-7/8"	3-3/16" (1'0") 4-3/16" (2'0")	3-7/8"	4-1/8" (6'8") 6-1/8" (7'0")	6-7/8"	8-3/8" (6'8") 10-3/8" (7'0")	MCB	Oak Grain
2'2" 2'4"	6'8" 7'0"	Six	1-3/8" 1-3/4"	7-7/8"	3-3/16" (2'2") 4-1/2" (2'4")	3-7/8"	4-1/8" (6'8") 6-1/8" (7'0")	6-7/8"	8-3/8" (6'8") 10-3/8" (7'0")	MCB	Oak Grain
2'6"	6'8" 7'0"	Six	1-3/8" 1-3/4"	8-7/8"	4-3/16"	3-7/8"	4-1/8" (6'8") 6-1/8" (7'0")	6-7/8"	8-3/8" (6'8") 10-3/8" (7'0")	MCB	Oak Grain
2'8"	6'8" 7'0"	Six	1-3/8" 1-3/4"	9-7/8"	4-3/10"	3-7/8"	4-1/8" (6'8") 6-1/8" (7'0")	6-7/8"	8-3/8" (6'8") 10-3/8" (7'0")	MCB	Oak Grain
2'10" 3'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	10-7/8"	4-3/16" (2'10") 5-3/16" (3'0")	3-7/8"	4-1/8" (6'8") 6-1/8" (7'0")	6-7/8"	8-3/8" (6'8") 10-3/8" (7'0")	MCB	Oak Grain

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.


8'0" DOORS

ARLINGTON




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0"	8'0"	Three	1-3/8" 1-3/4"	5-1/2"	3-1/4"	N/A	4-3/4"	6-7/8"	9-1/2"	B	Smooth
1'2"	8'0"	Three	1-3/8" 1-3/4"	7-1/2"	3-1/4"	N/A	4-3/4"	6-7/8"	9-1/2"	B	Smooth
1'3" 1'4"	8'0"	Three	1-3/8" 1-3/4"	8"	3-1/2" 4"	N/A	4-3/4"	6-7/8"	9-1/2"	B	Smooth
1'6" 1'8"	8'0"	Three	1-3/8" 1-3/4"	9-13/16"	4-3/32" 5-3/32"	N/A	4-3/4"	6-7/8"	9-1/2"	B	Smooth
1'10" 2'0"	8'0"	Six	1-3/8" 1-3/4"	5-1/2"	3-1/2" 4-1/2"	4"	4-3/4"	6-7/8"	9-1/2"	B	Smooth
2'2" 2'4"	8'0"	Six	1-3/8" 1-3/4"	7-1/2"	3-1/2" 4-1/2"	4"	4-3/4"	6-7/8"	9-1/2"	B	Smooth
2'6"	8'0"	Six	1-3/8" 1-3/4"	8"	4-1/2"	5"	4-3/4"	6-7/8"	9-1/2"	B	Smooth
2'8"	8'0"	Six	1-3/8" 1-3/4"	9"	4-1/2"	5"	4-3/4"	6-7/8"	9-1/2"	B	Smooth
2'10" 3'0"	8'0"	Six	1-3/8" 1-3/4"	9-13/16"	4-1/2" 5-1/2"	5-3/8"	4-3/4"	6-7/8"	9-1/2"	B	Smooth

ATHERTON®



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'10" 2'0"	8'0"	Four	1-3/8" 1-3/4"	5-9/16"	3-1/4" (1'10") 4-1/4" (2'0")	4-3/8"	4-7/16"	7"	8-15/16"	O	Smooth
2'2" 2'4"	8'0"	Four	1-3/8" 1-3/4"	7-9/16"	3-1/4" (2'2") 4-1/4" (2'4")	4-3/8"	4-7/16"	7"	8-15/16"	O	Smooth
2'6"	8'0"	Four	1-3/8" 1-3/4"	8-9/16"	4-1/4"	4-3/8"	4-7/16"	7"	8-15/16"	O	Smooth
2'8"	8'0"	Four	1-3/8" 1-3/4"	9-9/16"	4-1/4"	4-3/8"	4-7/16"	7"	8-15/16"	O	Smooth
2'10" 3'0"	8'0"	Four	1-3/8" 1-3/4"	11-9/16"	3-1/4" (2'10") 4-1/4" (3'0")	4-3/8"	4-7/16"	7"	8-15/16"	O	Smooth

BOSTONIAN®




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	8'0"	Three	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4"	6-7/8"	8-1/4"	MCB	Pine Grain
1'6" 1'8"	8'0"	Three	1-3/8" 1-3/4"	9-3/4"	4-1/8" (1'6") 5-1/8" (1'8")	N/A	4-1/4"	6-7/8"	8-1/4"	MCB	Pine Grain
1'10" 2'0"	8'0"	Six	1-3/8" 1-3/4"	5-15/16"	3-1/8" (1'10") 4-1/8" (2'0")	3-7/8"	4-1/4"	6-7/8"	8-1/4"	MCB	Pine Grain
2'2" 2'4" 2'6"	8'0"	Six	1-3/8" 1-3/4"	7-11/16"	3-3/8" (2'2") 4-3/8" (2'4") 5-3/8" (2'6")	3-7/8"	4-1/4"	6-7/8"	8-1/4"	MCB	Pine Grain
2'8" 2'10" 3'0"	8'0"	Six	1-3/8" 1-3/4"	9-11/16"	4-3/8" (2'8") 5-3/8" (2'10") 6-3/8" (3'0")	3-7/8"	4-1/4"	6-7/8"	8-1/4"	MCB	Pine Grain

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.


8'0" DOORS

BRISTOL




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	8'0"	Three	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	5-1/16"	6-7/8"	8-7/16"	MCB	Smooth
1'6" 1'8"	8'0"	Three	1-3/8" 1-3/4"	11-15/16"	3-1/32" (1'6") 4-1-32" (1'8")	N/A	5-1/16"	6-7/8"	8-7/16"	MCB	Smooth
1'10" 2'0"	8'0"	Six	1-3/8" 1-3/4"	5-15/16"	3-1/8" (1'10") 4-1/8" (2'0")	3-7/8"	5-1/16"	6-7/8"	8-7/16"	MCB	Smooth
2'2" 2'4"	8'0"	Six	1-3/8" 1-3/4"	5-15/16" (2'2") 7-15/16" (2'4")	5-1/8" (2'2") 4-1/8" (2'4")	3-7/8"	5-1/16"	6-7/8"	8-7/16"	MCB	Smooth
2'6"	8'0"	Six	1-3/8" 1-3/4"	8-15/16"	4-1/8"	3-7/8"	5-1/16"	6-7/8"	8-7/16"	MCB	Smooth
2'8"	8'0"	Six	1-3/8" 1-3/4"	9-15/16"	4-1/8"	3-7/8"	5-1/16"	6-7/8"	8-7/16"	MCB	Smooth
2'10" 3'0"	8'0"	Six	1-3/8" 1-3/4"	9-15/16" (2'0") 11-15/16" (3'0")	5-1/8" (2'10") 4-1/8" (3'0")	3-7/8"	5-1/16"	6-7/8"	8-7/16"	MCB	Smooth

CAMBRIDGE



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-7/16"	7"	8-15/16"	O	Smooth
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	9-3/4"	4-1/8" (1'6") 5-1/8" (1'8")	N/A	4-7/16"	7"	8-15/16"	O	Smooth
1'10" 2'0"	8'0"	Two	1-3/8" 1-3/4"	13-11/16"	4-5/32" (1'10") 5-5/32" (2'0")	N/A	4-7/16"	7"	8-15/16"	O	Smooth
2'2" 2'4" 2'6"	8'0"	Two	1-3/8" 1-3/4"	17-11/16" 17-11/16" 19-11/16"	4-5/32" (2'2") 5-5/32" (2'4") 5-5/32" (2'6")	N/A	4-7/16"	7"	8-15/16"	O	Smooth
2'8" 2'10" 3'0"	8'0"	Two	1-3/8" 1-3/4"	21-11/16" 23-11/16" 23-11/16"	5-5/32" (2'8") 5-5/32" (2'10") 6-5/32" (3'0")	N/A	4-7/16"	7"	8-15/16"	O	Smooth

COLONIAL




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'6" 1'8"	8'0"	Three	1-3/8" 1-3/4"	11-9/16"	3-7/32" (1'6") 4-7/32" (1'8")	N/A	4-1/4"	7"	9"	O	Pine Grain
1'10" 2'0"	8'0"	Six	1-3/8" 1-3/4"	5-9/16"	3-1/4" (1'10") 4-1/4" (2'0")	4-3/8"	4-1/4"	7"	9"	O	Pine Grain
2'2" 2'4"	8'0"	Six	1-3/8" 1-3/4"	7-9/16"	3-1/4" (2'2") 4-1/4" (2'4")	4-3/8"	4-1/4"	7"	9"	O	Pine Grain
2'6"	8'0"	Six	1-3/8" 1-3/4"	8-9/16"	4-1/4"	4-3/8"	4-1/4"	7"	9"	O	Pine Grain
2'8"	8'0"	Six	1-3/8" 1-3/4"	9-9/16"	4-1/4"	4-3/8"	4-1/4"	7"	9"	O	Pine Grain
3'0"	8'0"	Six	1-3/8" 1-3/4"	11-9/16"	4-1/4"	4-3/8"	4-1/4"	7"	9"	O	Pine Grain

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman


*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

CONTINENTAL™




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	5-1/4"	4-1/4"	11"	O	Smooth
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	9-3/4"	4-1/8" (1'6") 5-1/8" (1'8")	N/A	5-1/4"	4-1/4"	11"	O	Smooth
1'10" 2'0" 2'2"	8'0"	Two	1-3/8" 1-3/4"	14"	4" (1'10") 5" (2'0") 6" (2'2")	N/A	5-1/4"	4-1/4"	11"	O	Smooth
2'4" 2'6"	8'0"	Two	1-3/8" 1-3/4"	18" 20"	5" (2'4") 5" (2'6")	N/A	5-1/4"	4-1/4"	11"	O	Smooth
2'8" 2'10" 3'0"	8'0"	Two	1-3/8" 1-3/4"	24"	4" (2'8") 5" (2'10") 6" (3'0")	N/A	5-1/4"	4-1/4"	11"	O	Smooth

PRINCETON



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	5-1/4"	3-3/4"	8-1/4"	MCB	Smooth
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	9-1/2"	4-1/4" (1'6") 5-1/4" (1'8")	N/A	5-1/4"	3-3/4"	8-1/4"	MCB	Smooth
1'10" 2'0"	8'0"	Two	1-3/8" 1-3/4"	14-15/16"	3-1/2" (1'10") 4-1/2" (2'0")	N/A	5-1/4"	3-3/4"	8-1/4"	MCB	Smooth
2'2" 2'4"	8'0"	Two	1-3/8" 1-3/4"	18-1/8"	3-15/16" (2'2") 4-15/16" (2'4")	N/A	5-1/4"	3-3/4"	8-1/4"	MCB	Smooth
2'6"	8'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-1/8" (2'6")	N/A	5-1/4"	3-3/4"	8-1/4"	MCB	Smooth
2'8"	8'0"	Two	1-3/8" 1-3/4"	22-13/16"	4-1/2" (2'8")	N/A	5-1/4"	3-3/4"	8-1/4"	MCB	Smooth
2'10" 3'0"	8'0"	Two	1-3/8" 1-3/4"	25"	4-1/2" (2'10") 5-1/2" (3'0")	N/A	5-1/4"	3-3/4"	8-1/4"	MCB	Smooth


ROCKPORT™



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'6"	8'0"	6	1-3/8" 1-3/4"	8-1/2"	4-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth
1'8"	8'0"	6	1-3/8" 1-3/4"	8-1/2"	5-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth
2'0"	8'0"	6	1-3/8" 1-3/4"	14-1/2"	4-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth
2'2"	8'0"	6	1-3/8" 1-3/4"	14-1/2"	5-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth
2'4"	8'0"	6	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth
2'6"	8'0"	6	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth
2'8"	8'0"	6	1-3/8" 1-3/4"	22-1/2"	4-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth
2'10"	8'0"	6	1-3/8" 1-3/4"	22-1/2"	5-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth
3'0"	8'0"	6	1-3/8" 1-3/4"	25-3/4"	5-1/8"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth


8'0", BIFOLD & COMMERCIAL DOORS

SANTA FE



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-3/8"	7"	9-7/8"	O	Smooth
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	10"	4" (1'6") 5" (1'8")	N/A	4-3/8"	7"	9-7/8"	O	Smooth
1'10" 2'0"	8'0"	Two	1-3/8" 1-3/4"	14"	4" (1'10") 5" (2'0")	N/A	4-3/8"	7"	9-7/8"	O	Smooth
2'2" 2'4"	8'0"	Two	1-3/8" 1-3/4"	18"	4" (2'2") 5" (2'4")	N/A	4-3/8"	7"	9-7/8"	O	Smooth
2'6"	8'0"	Two	1-3/8" 1-3/4"	21"	4-1/2"	N/A	4-3/8"	7"	9-7/8"	O	Smooth
2'8"	8'0"	Two	1-3/8" 1-3/4"	23"	4-1/2"	N/A	4-3/8"	7"	9-7/8"	O	Smooth
2'10" 3'0"	8'0"	Two	1-3/8" 1-3/4"	24"	5" (2'10") 6" (3'0")	N/A	4-3/8"	7"	9-7/8"	O	Smooth

BIFOLDS




Door Design	Heights*	# of Panels	Thickness	Widths* 2 doors or 1 unit	Widths* 4 doors or 2 units
Arlington	6'7"; 6'11"; 7'11"	Three	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Atherton*	6'7"; 6'11"; 7'11"	Two	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Avalon*	6'7"; 6'11"	Three	1-3/8"	2'0"; 2'6"; 3'0"	4'0"; 5'0"; 6'0"
Bostonian*	6'7"; 6'11"; 7'11"	Three	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Bristol	6'7"; 6'11"; 7'11"	Three	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Cambridge	6'7"; 6'11"; 7'11"	Two	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Camden*	6'7"; 6'11"	Two	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Colonial	6'7"; 6'11"; 7'11"	Three	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Continental™	6'7"; 6'11"; 7'11"	Two	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Craftsman III™	6'7"	Two	1-3/8"	1'8"; 1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	4'0"; 5'0"; 6'0"
Princeton	6'7"; 6'11"; 7'11"	Two	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Provincial*	6'7"; 6'11"	Two	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Rockport	6'7"; 6'11"	Five	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Santa Fe	6'7"; 6'11"; 7'11"	Two	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"

* All panel, inner stile, top rail and lock rail measurements will match those listed above. Outer stile measurements may vary 1/4" (depending on pre-fit). All bottom rail measurements will be 1" shorter than the measurements listed above in order to accommodate track and hardware.

Bifolds are available in alternate heights and widths. Please contact your local JELD-WEN facility for specifications and availability of alternate sizes. All bifolds are boxed (or end-capped) with track and hardware included.

COMMERCIAL WIDE STILE



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
3'0" Arlington	6'8" 7'0"	Six	1-3/8" 1-3/4"	9"	6-1/2"	5"	5-9/16" (6'8") 7-9/16" (7'0")	6-7/16"	10-1/2" (6'8") 12-1/2" (7'0")	B	Smooth
3'0" Continental	6'8" 7'0"	Two	1-3/8" 1-3/4"	24"	6"	N/A	5-1/4" (6'8") 7-1/4" (7'0")	4-3/16"	10-13/16" (6'8") 12-13/16" (7'0")	O	Smooth
3'0" Colonial	6'8" 7'0"	Six	1-3/8" 1-3/4"	9-1/8"	6-7/16"	4-7/8"	4-1/2" (6'8") 6-1/2" (7'0")	6-7/16"	10-9/16" (6'8") 12-9/16" (7'0")	O	Oak Grain

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

JELD-WEN® INTERIOR AND EXTERIOR DOOR SLAB AND SYSTEM LIMITED WARRANTY

OUR WARRANTY TO YOU...

JELD-WEN® Products¹ are designed to create lasting value for your home. This warranty is effective for JELD-WEN products manufactured on or after **May 1, 2012** for use in the United States and Canada. Any previous warranties will continue to apply to products manufactured by JELD-WEN prior to this date. For additional information, including care and maintenance information refer to www.jeld-wen.com or www.jeld-wen.ca.

What This Warranty COVERS

We warrant to the original owner² that if your JELD-WEN Product exhibits a defect in material or workmanship within the time periods from the date of purchase as specified below, we will, at our option, repair, replace or refund the purchase price of the Product or component part. Skilled labor³ (where deemed necessary by us) to repair or replace any component is provided for **one (1) year** from the date of purchase.

Owner-Occupied Single-Family Residence Limited Warranty

Door Slabs: Except as set forth below, we warrant our door slabs, including any glass inserts, miscellaneous hardware, and accessories provided and installed by us, as follows:

Door Slab	Coverage
Fiberglass Exterior Doors	As long as you own and occupy your residence
FiberLast® Engineered Composite Exterior Doors	As long as you own and occupy your residence
Steel Exterior Doors	Ten (10) years
Wood Exterior Doors	Five (5) years
Interior Doors	Five (5) years

Factory Prefinish: We warrant the factory-applied prefinish on our doors against peeling, checking, or cracking for periods listed below. Should the factory prefinish be proven defective, we will at our option, replace or refinish the door or pay up to credit per opening to the current owner. (Note: this coverage applies to factory-applied finish coat options only; standard factory-applied primer is not a finish coat.)

Product	Coverage	Refinish Credit
Aurora® Fiberglass Doors	5 years	\$350 per opening
Custom Exterior Wood Doors	1 year	\$250 per opening
Custom Interior Wood Doors	1 year	\$150 per opening
All other Doors	1 year	\$100 per opening

Door Frames: We warrant our door frames for **one (1) year** from the date of purchase.

AuraLast® Protection for Door Slabs and Frames: Our AuraLast pine wood door slabs will be free from wood decay and/or termite damage for **twenty (20) years** from the date of initial purchase. Our AuraLast pine door frame components will be free from wood decay and/or termite damage **for as long as the original consumer owns the home** in which the AuraLast wood frames are originally installed. Warranty coverage outside Canada, the contiguous 48 states and Alaska is contingent upon approval from the JELD-WEN Customer Care Department. Please contact us.

Severe Weather® Glass: We warrant each Severe Weather glass unit for **ten (10) years**.

Retractable Screens: We warrant retractable roll screens for **five (5) years**.

Spontaneous Glass Breakage: We warrant sealed glass units installed in exterior doors (excluding laminated glass, and special glazings) for spontaneous breakage for **one (1) year** (including free replacement glass and skilled labor³ necessary

to replace the glass for one (1) year. Spontaneous breakage occurs when the glass develops a crack without sign of impact.

Commercial Limited Warranty (Other than Owner-Occupied Single-Family Residence)

Fiberglass, FiberLast, Steel, Wood and Interior Door Slabs: We warrant our door slabs for **five (5) years** from the date of initial purchase.

All Other Products, Components, Prefinishes, and Options as Listed Above: Coverage is the same as for Owner-Occupied Single-Family Residences as listed above.

Transferability

This warranty is not transferable.

How to Get Assistance

If you have a problem with your JELD-WEN Door, immediately upon discovery, contact the distributor or dealer from whom you purchased our product or contact us directly:

In the United States:

Mail: JELD-WEN Customer Care
Attn: Door Warranty Claims
P.O. Box 1329, Klamath Falls, OR 97601
Phone: 800-JELD-WEN (800-535-3936)
Fax: 800-436-5954
Email: CustomerServiceAgents@jeld-wen.com
Web: www.jeld-wen.com/contact-us

In Eastern Canada:

Mail: JELD-WEN Service Department
90, rue Industrielle
Saint-Appollinaire, Quebec, Canada G0S 2E0
Phone: 800-463-1930
Fax: 888-998-1599

In Western Canada:

Mail: JELD-WEN Service Department
550 Munroe Avenue
Winnipeg, Manitoba, Canada R2K 4H3
Phone: 888-945-5627
204-668-8230
Fax: 204-663-1072
Email: wpgservice@jeld-wen.com

We can respond quickly and efficiently if you provide the following: a) date and location of purchase, or product identification from the tag on the top edge of the slab, b) how to contact you, c) the address where the product can be inspected, and d) a description of the apparent problem and the product (photographs are helpful).

What We Will Do

Upon receiving your notification, we will send out an acknowledgement within three business days to the contact, which you have provided. We will investigate your claim and will begin to take appropriate action within 30 days after receipt of notification. If your warranty claim is denied, we may charge an inspection fee for an onsite inspection that is required or requested by you.

If your claim is accepted, and we choose to repair or replace the product or a component of the product, the replacement product/component will be provided in the same specification as the original product. Replacement products, components and services are warranted for the balance of the original product or service warranty, or 90 days, whichever is longer.

If the claimed nonconformity is warp of a door slab, we may defer repairing or replacing the door slab for a period up to 12 months from the date of claim. It is not uncommon for a temporary warp condition to occur as the door slab adjusts to local humidity and temperature conditions. This deferral will not be counted against the warranty period.

Continued on next page

What This Warranty Does NOT Cover

JELD-WEN manufactures and sells both individual door slabs and complete door systems. This warranty does not cover parts or components (e.g., locksets, handles, etc.) not sold by JELD-WEN to the original owner. See your distributor or dealer regarding the warranty on the entire door system and/or these other components.

We are not liable for:

- Normal wear and tear, including normal wear and tear of weatherstrip; and natural weathering of surfaces or variations in the color or texture of wood or finish; surface cracks that are less than 1/32" in width and/or 2" in length; for knotty alder and juniper: surface checks that are less than 1/8" in width and/or 5" in length, and knot placement, quantity, or size.
- Problems due to misuse or abuse; failure to follow the care and maintenance instructions; or as a result of any cause beyond our reasonable control (e.g. fire, flood, earthquake, other acts of nature, and acts of third parties outside of our control).
- Problems related to: improper field finishing of all surfaces (front and back) and edges (top, bottom, and sides) of the door slab and frame (See our Finishing Instructions at www.jeld-wen.com/resources); variation or unsatisfactory results in sheen or texture resulting from the field application of paint or any other finishing material.
- Failure to provide an adequate overhang for exterior doors; damage caused by extreme temperature buildup where storm doors are present. For general guidelines, see our "Appropriate Protection for Exterior Doors" in our product literature or at www.jeld-wen.com/resources; for specific information pertaining to your structure, consult your contractor or other building professional.
- Warp for any 3'6" wide by 8'0" high by 1 3/4", or smaller door slab, which does not exceed 1/4" in the plane of the door slab itself; door slabs wider and/or higher are not guaranteed for warp.
- Bow or misalignment in the frame or jamb in which the door slab is hung (if such is purchased from JELD-WEN unmachined and not prehung).
- Slight expansion or contraction due to varying environmental conditions; slab movement (shrinkage or swelling) of 1/4" or less due to temperature and humidity, consult our Care & Maintenance documents on how to work with this natural movement.
- Wood decay for wood components other than of AuraLast pine; and wood decay for any wood components (including pine) that come in direct contact with soil. Note: superficial mold/mildew does not indicate wood decay.
- Problems related to water and/or air infiltration due to improper assembly; installation errors or flaws in building design and construction; installation must be in strict conformance with the installation instructions provided by the manufacturer of the door entry system.
- Structural integrity issues or other problems caused by improper field fitting of the hardware, improper sizing of the door slab, or other assembly problems.
- Slight imperfections or wavy distortions in the glass that don't impair structural integrity. Note: wavy distortions in the glass (e.g. related to laminate interlayer or heat strengthening of glass) are not considered a defect. Slight color variations in glass are not considered a defect.
- Screen damage due to normal wear and tear, misuse, abuse, or insect or animal activity.
- Condensation or damage as a result of condensation (Note: unless due to insulating glass failure, most condensation problems are related to excessive humidity levels in a structure; contact a heating/air conditioning specialist for help).
- Damage or poor product performance resulting from installation into a condition that exceeds product design standards and/or certified performance specifications and/or does not comply with applicable building codes.
- Hardware, accessories or inserts that are not provided by us.

- Discoloration or rusting of decorative metal accent options, such as grilles, clavos, straps, etc.; discoloration of wood sills provided by us.
- Cost for labor, removal or disposal of defective product(s), installation or finishing of the replacement door or component.
- Incidental or consequential damage. Some states/provinces do not allow the exclusion or limitation of incidental or consequential damages, so this may not apply to you.

Important Legal Information --

Please read this carefully. It affects your rights.

This Limited Warranty document sets forth our maximum liability for our products. We shall not be liable for special, indirect, consequential, or incidental damages. Your sole and exclusive remedy with respect to any and all losses or damages resulting from any cause whatsoever shall be as specified above. We make no other warranty or guarantee, either express or implied, including implied warranties of merchantability and fitness for a particular purpose to the original purchaser or to any subsequent user of the Product, except as expressly contained herein. In the event state or provincial law precludes exclusion or limitation of implied warranties, the duration of any such warranties shall be no longer than, and the time and manner of presenting any claim thereon shall be the same as, that provided in the express warranty stated herein. This Limited Warranty document gives you specific legal rights, and you may have other rights that vary from state/province to state/province.

Any dispute, controversy or claim arising out of or relating to this warranty, any alleged breach thereof, or the use or sale of the products to which this warranty applies shall be resolved by mandatory and binding arbitration administered by the American Arbitration Association in accordance with its commercial arbitration rules. Original purchaser agrees that they may assert claims against JELD-WEN in their individual capacity only, and not as a plaintiff or class member in any purported class action proceeding. Rejection of these dispute resolution provisions must be sent to JELD-WEN at the address provided herein within thirty (30) days of original purchaser's receipt of the Products to which this warranty applies.

No distributor, dealer or representative of JELD-WEN has the authority to change, modify or expand this warranty. The original purchaser of this Product acknowledges that they have read this warranty, understand it and are bound by its terms and agrees to provide this warranty to the original owner of the structure into which the Product is installed.

¹ "JELD-WEN Products" shall refer to interior and exterior door slabs and systems manufactured in the United States and marketed under the JELD-WEN brand name for use in the United States and Canada. See our separate Export Warranty for applicable coverage on products used outside the United States and Canada.

² This warranty extends to the original owner (original owner means the contractor/dealer/distributor/purchaser and the initial owner of the structure where the product is initially installed) and is not transferable. The original purchaser of this product acknowledges that they have read this warranty, understand it and are bound by its terms and agrees to provide this warranty to the original owner of the structure into which the product is installed. Should state or provincial law preclude no transferability, then the warranty period is effective as applicable up to **five (5)** years from the date of initial purchase for door slabs and systems and **one (1)** year from the date of manufacture for the factory pre-finish.

³ "Skilled labor" refers to tasks where specialized technical knowledge, experience, methods or tools are required to properly identify, diagnose and/or correct product-related problems.

© 2010, JELD-WEN, inc. | JELD-WEN, Aurora, FiberLast and AuraLast are trademarks or registered trademarks of JELD-WEN, inc., Oregon, USA. All other marks are the property of their respective owners.

ABOUT JELD-WEN



Since 1960, when JELD-WEN began with one Oregon millwork plant, we've been dedicated to crafting reliable windows and doors. Today you can see, touch and feel reliability in our beautiful windows and doors because of their durability, energy efficiency and worry-free performance.

We measure our success by the relationships we build with our customers, suppliers and communities where we live and work. We've partnered with organizations such as the Green Building Initiative, which accelerates green-building practices by promoting environmentally progressive approaches that are practical, affordable and accessible.

Another way we fulfill our commitment to the communities where we operate, is through the JELD-WEN Foundation, which was created in 1969 to support worthwhile endeavors in the communities where JELD-WEN operates.

JELD-WEN is an official partner of Major League Soccer and the Portland Timbers, as well as a founding member of the Portland Timbers Community Fund. Our soccer partnerships help us connect with grass roots efforts that build strong communities.

Every time the Timbers score a goal, we sponsor a tree to be planted through Friends of Trees.

The JELD-WEN website is your ultimate resource for learning about our reliable windows and doors. It has all the product information and design advice you need. Visit us at **jeld-wen.com** today.



Official window and door provider of Major League Soccer



JELD-WEN is proud to support a better way to build

©2012, 2011 JELD-WEN, inc.; Door designs and this publication are owned by JELD-WEN, inc. and are protected under the U.S. Copyright Act and other intellectual property laws. All trademarks, service marks, logos and the like (whether registered or unregistered) are owned or controlled by JELD-WEN, inc. or others. Unauthorized use or duplication of JELD-WEN intellectual property is prohibited.

JELD-WEN reserves the right to change product specifications without notice. Please check our website, **jeld-wen.com**, for current information.

10-030 08/12 (CDS 9M)